


Multipurpose ACRYLIC RENDER

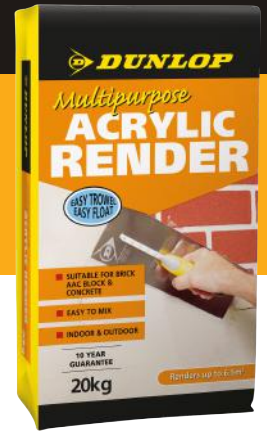

A multipurpose, acrylic render suitable for indoor and outdoor projects over a wide variety of surfaces including brickwork, AAC blocks and concrete. The unique formulation is creamy, boasts superior trowelability and produces a build up to 10mm with no sagging or cracking.

APPLICATION RANGE

Suitable for rendering walls, both indoor and outdoor, at application thicknesses of 2-10 mm.

It can be applied over the following surfaces:

- Brickwork
 - Concrete blockwork
 - Concrete walls
 - AAC (autoclaved aerated concrete) panels and blocks.
- Not suitable over FC Sheet/Blueboard.

SURFACE PREPARATION

Clean off dust, oil, grease and all loose contaminating materials or coatings. Green concrete should be allowed to cure for 28 days prior to rendering. If dry and porous, dampen the surface to be rendered by brushing or sponging the surface or applying a light mist spray of water to prevent rapid drying of the render. Porous concrete will require priming with DUNLOP PRIMER and allowed to dry for 30 minutes prior to the application of the render. Use of a primer will extend the drying time of the render.

MIXING

1. Add approximately 3.0 to 3.5L of clean water to a bucket.
2. Gradually add 20kg of DUNLOP MULTIPURPOSE ACRYLIC RENDER to the water whilst mixing with an electric mixer to disperse the powder into a creamy, lump free consistency.
3. Allow the mix to stand for up to 5 minutes, remix and then begin applying.

APPLICATION

1. Apply the render with a steel trowel, evenly spreading the mix over the surface.
2. A straight edge can be used to check for level or flatness of the render.
3. After 10-30 minutes, depending on ambient and surface conditions, work can begin on the surface finish. The surface finish can be dense and smooth by using a wooden or plastic float or coarse and sandy by using a sponge to give the required effect.
4. The mixed material is useable for up to 1 hour @ 23°C and 50% relative humidity.

DRYING TIME

The render surface is touch dry in 2-4 hours @ 23°C. A second coat may be applied after 6-8 hours and the surface will reach full cure after 7 days. Before application of a decorative finish (i.e. paint) allow the render to cure for a minimum of 1 day for each 2mm thickness of the render.

Cold, damp or humid conditions may lengthen the drying time.

COVERAGE

Coverage will vary depending on the condition of the surface and site conditions. As a guide, 20kg of DUNLOP MULTIPURPOSE ACRYLIC RENDER will cover approximately 6.5m² at 2mm thickness. As a guide, 20kg will cover:

- 6.5m² at 2mm thickness
- 2.6m² at 5mm thickness
- 1.3m² at 10mm thickness

CLEAN UP

Clean all tools in water immediately after use.

SHELF LIFE

12 months when stored in the original unopened packaging, in a dry place at 23°C and 50% relative humidity.

PRECAUTIONS

DUNLOP MULTIPURPOSE ACRYLIC RENDER is not suitable for use over floors and is not suitable for application over painted surfaces. Do not apply in temperatures below 5°C or above 35°C or application in extreme conditions such as high wind or direct sunlight.

SAFETY DATA

This product may cause irritation and an allergic reaction to the skin. It may cause serious eye and irritation to the respiratory system. In case of contact with the eyes rinse with running water (15 mins) including removal of contaminated clothing. Wear protective gloves, clothing, eye and face protection. Avoid inhaling dust/fume/gas/mist/vapours/spray. Ensure adequate ventilation during mixing and application. Store locked up. Check with your local Council regarding the disposal of contents. Keep out of the reach of children. Call the Poisons Information Centre on 131 126 (AUS) and 0800 764 766 (NZ) or call a doctor if you feel unwell. Additional information is in the Safety Data Sheet (SDS) at www.dunlopdiy.com.

10 YEAR GUARANTEE

Ardex Australia Pty Ltd ("we" or "us") guarantees this product (also referred to as "our goods") is free from manufacturing defects and will perform to any applicable specification published by us for 10 years from the date of application of the product if such application occurs within this product's specified shelf life. Our liability under this guarantee is limited at our option to replacement of the product, repair of any damage to the immediate



Multipurpose

ACRYLIC RENDER

surface or area of application of the product, or the cost of such replacement or repair, in each case if we are satisfied loss or damage was due to a breach of this guarantee. This guarantee does not apply if damage or loss is due to failure to follow our published instructions or any act or circumstance beyond our control, including shade variations and efflorescence and faulty workmanship on the part of any installer or applicator of the product. If you wish to make a claim under this guarantee you must notify us (address: 7/20 Powers Road Seven Hills NSW 2147; phone: 1800222841; email: technicalservices@ardexaustralia.com), identify the product and provide evidence of your purchase and the subsequent application of the product within 30 days of any alleged loss or damage occurring. We reserve the right to ask you for satisfactory evidence of any alleged loss or damage and to undertake any inspections and tests necessary to establish your rights under this guarantee. Any claim under this guarantee is at your cost. This guarantee is in addition to any rights or remedies you may have as a "consumer" under the Australian Consumer Law and to that extent you need to be aware that: "Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure".

USER NOTES

The technical details and recommendations contained are given in good faith and represents the best of our knowledge and experience at the time of printing. It is the responsibility of the user to ensure that the products are used in accordance with Dunlop product instructions and in applications for which they are intended.